



LOW RISE RESIDENTIAL AND COMMERCIAL SOLUTION



GENERAL SPECIFICATION:

Load	320 - 450 - 550 - 630 - 800 - 900 -1000kg
Speed	1 - 1.75 m/s
Maximum Travel	80m
Entrance	Front only or thru-car
Door Type	Automatic Side & Central Opening
Clear Door Opening	700 / 800 / 900 mm
Door Height	2100 mm
Car Dimensions	Standard
Internal Care Height	230mm
Supply	Three-phase


CONTROL TECHNOLOGY

Nidec engineers have created the industry's most diverse and comprehensive line of elevator control products. Our sophisticated designs and state-of-the-art manufacturing technology work together to produce field-proven, reliable products.

MACHINE TECHNOLOGY

Nidec provides a wide power range of AC, AC Permanent Magnet, and DC motors for any installations. ACPM machines use 30% less power and are simple and more dependable than induction motors.

This is the standard dimensions for 320, 450, 550, 630, 800, 900 and 1000kg elevator packages with HLSS finish and half mirror and handrail on rear wall, 20mm recess flooring, dot-matrix indicators, and UPS.

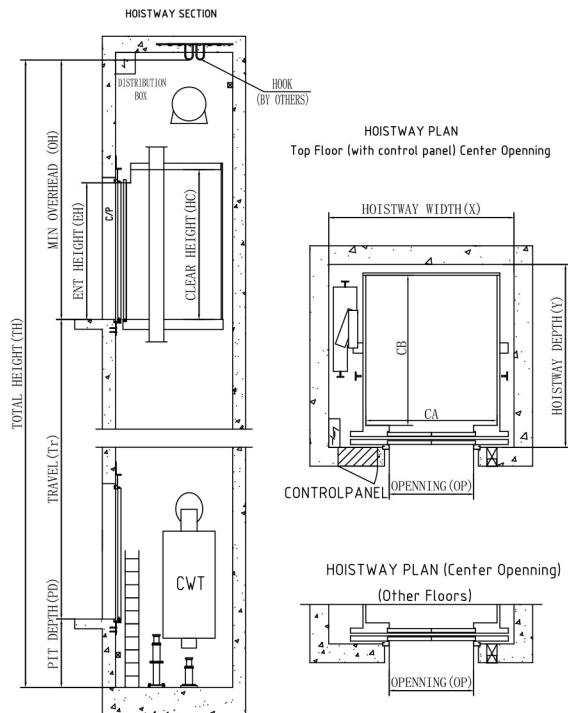

CAPACITY (KG)	SPEED (M/S)	SHAFT SIZE (MM)	CAB SIZE (MM)	DOOR (MM)	STOPS
320	1	1800 X 1600	850X1100X2300	700 X 2100 S/O	2
450	1	1800 X 1650	1100X1150X2300	800 X 2100 C/O	2
550	1	1800 X 1750	1100X1350X2300	800 X 2100 C/O	2
630	1	1800 X 1800	1100X1450X2300	800 X 2100 C/O	2
800	1	1800 X 2000	1100X1650X2300	800 X 2100 C/O	2
900	1	2000 X 2000	1300X1650X2300	900 X 2100 C/O	2
1000	1	2000 X 2000	1400X1650X2300	900 X 2100 C/O	2

CAPACITY (KG)	SPEED (M/S)	SHAFT SIZE (MM)	CAB SIZE (MM)	DOOR (MM)	STOPS
320	1	1600 X 1600	850X1100X2300	700 X 2100 S/O	2
450	1	1800 X 1650	1100X1150X2300	800 X 2100 C/O	2
550	1	1800 X 1750	1100X1350X2300	800 X 2100 C/O	2
630	1	1800 X 1800	1100X1450X2300	800 X 2100 C/O	2
800	1	1800 X 2000	1100X1650X2300	800 X 2100 C/O	2
900	1	2000 X 2000	1300X1650X2300	900 X 2100 C/O	2
1000	1	2000 X 2000	1400X1650X2300	900 X 2100 C/O	2
CAPACITY (KG)	OH (MM)	PIT (MM)	MAX TRAVEL (M)		
1	3800	1300	45		
1.5	3900	1450	70		
1.75	4000	1550	80		

